

Chapter 8

Main Memory

Images from Silberschatz

How does the OS manage memory?


- Allocation
 - Swapping
 - Hardware support
 - Pentium + Linux
-
- Assume the entire process must be in memory!
 - Virtual Memory – chapter 9
 - Does not make this assumption


Memory Access Basics

- Register
- Cache
 - Stall
- Main Memory
- Disk
- Protection

(Basic) Mapping + Protection

- Software
 - Thinks it can access address zero to limit
- Hardware
 - Two registers
 - Base
 - Limit
 - Privileged instructions
 - Kernel mode!
 - On error
 - Trap!

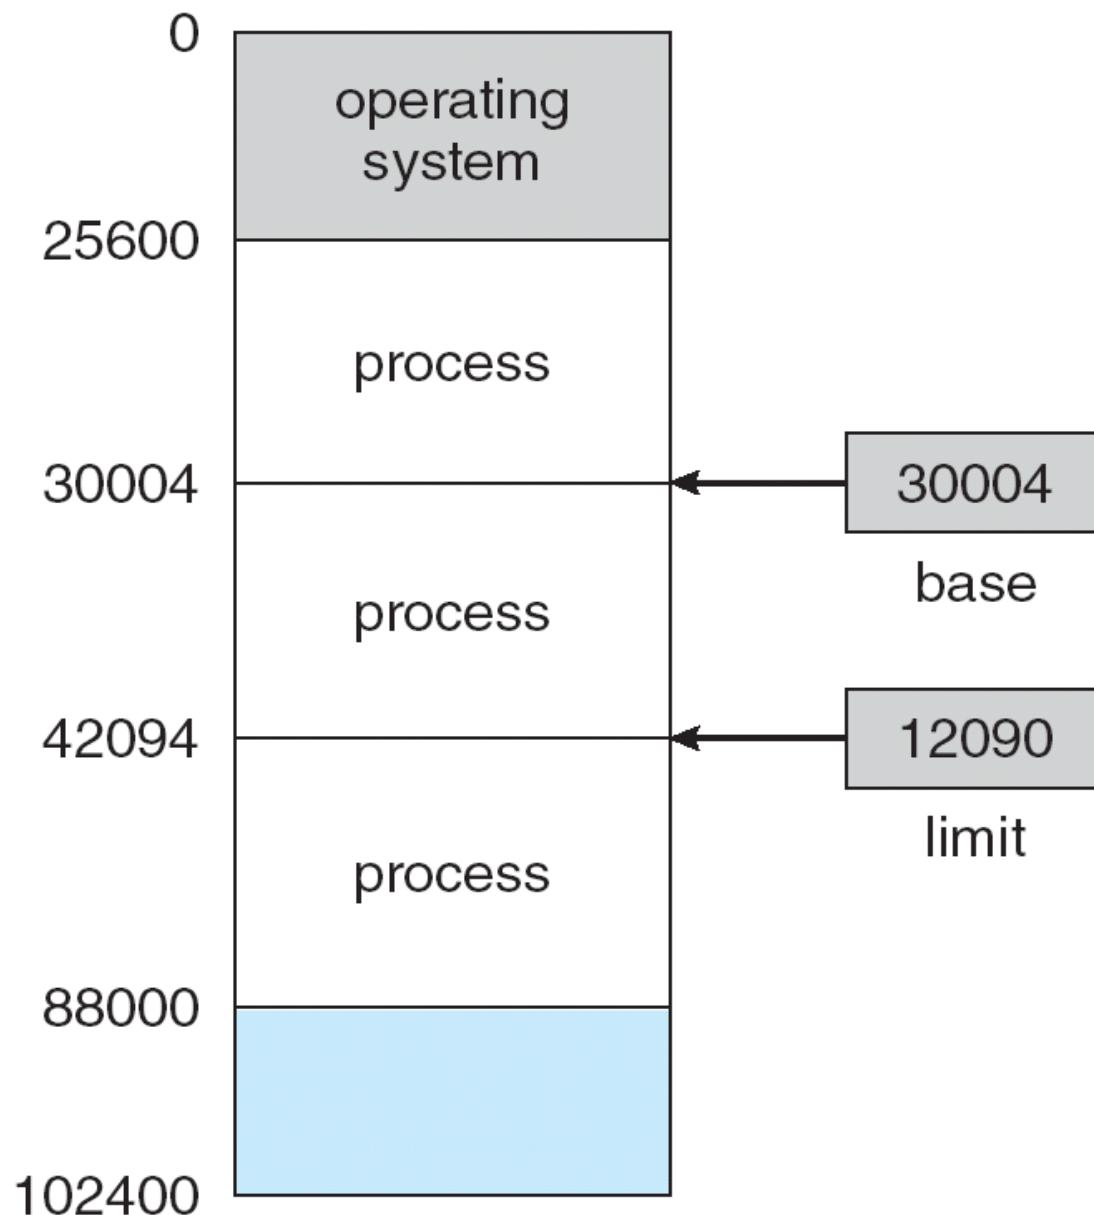

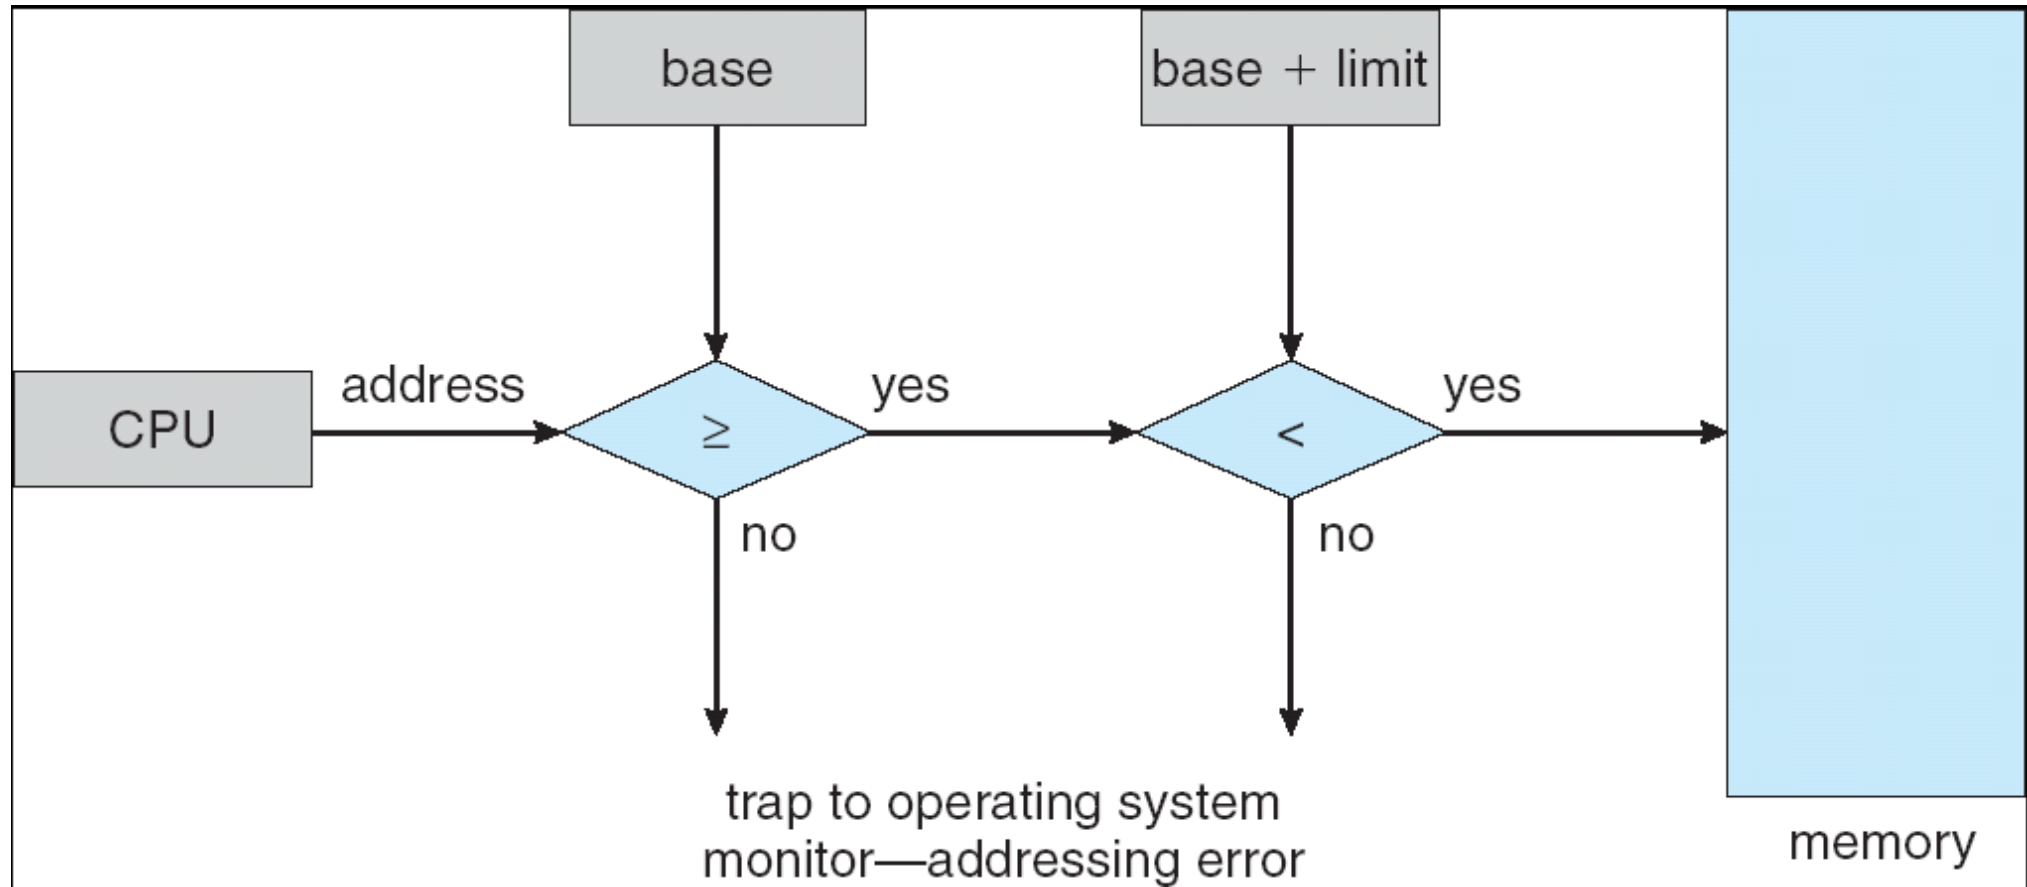

Address Bind Time

- When are addresses in the executable set?

- Compile time


- Must always be in the same location

- Load time

- Can be loaded anywhere

- Execution time


- Can be *moved* during execution!

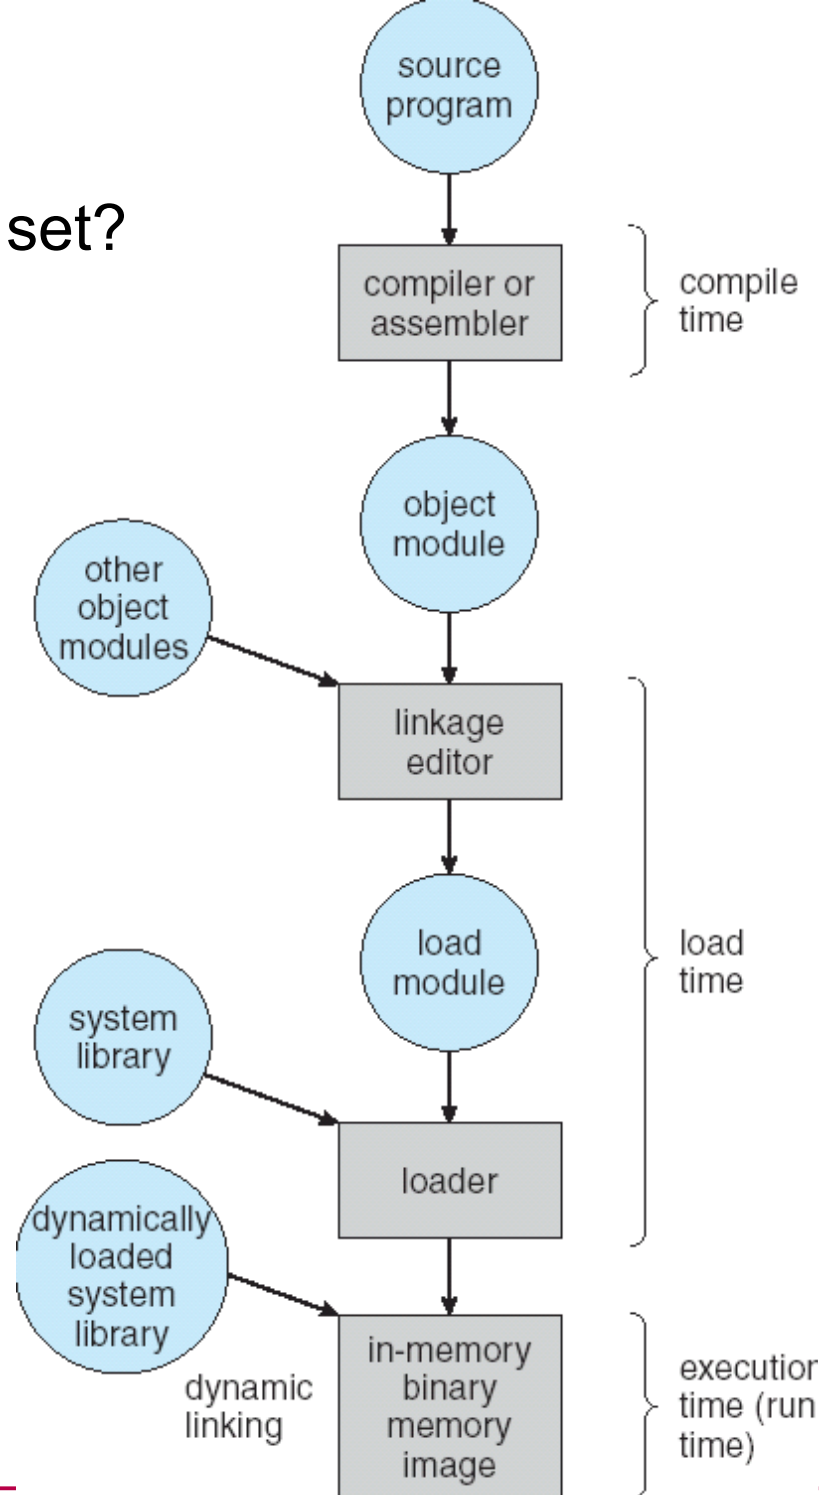

Logical vs Physical Addresses

- Logical Address (Virtual Address)
 - Software only ever sees this!

- Physical Address

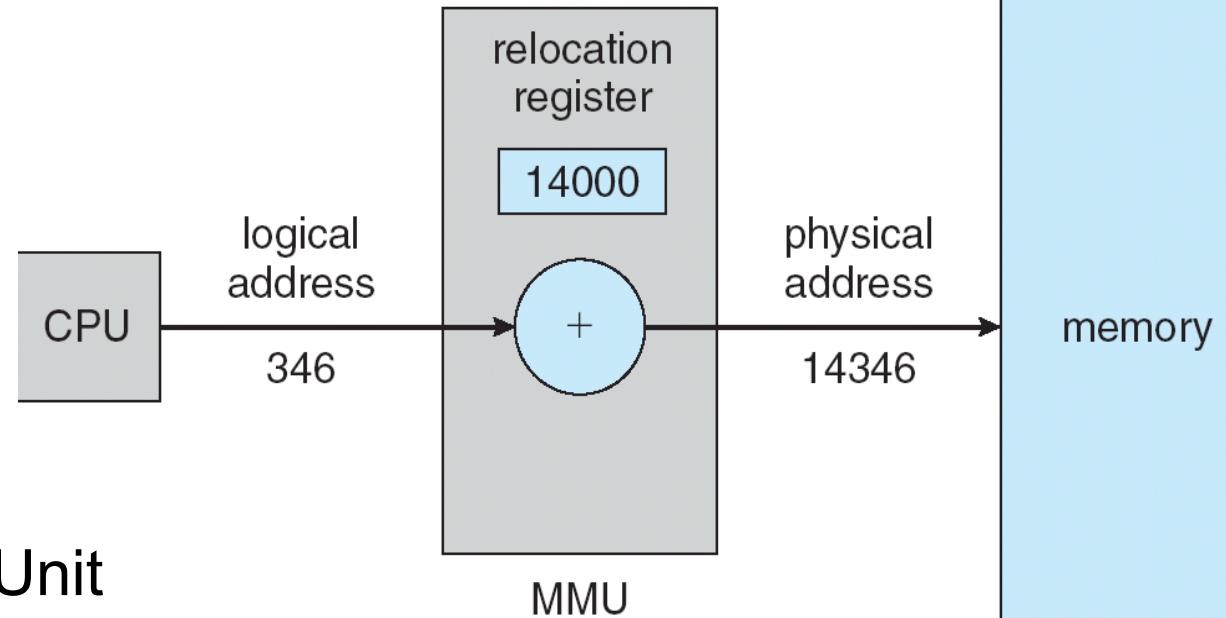

- Memory Management Unit
 - Generalization of the base/limit register method
 - Relocation register

Dynamic Linking

- Linking at execution time
- Static linking
- stub
- Shared libraries
 - .dll or .so

Swapping

- Not all processes fit in physical memory
 - Chapter 9: not all of a *single process* will fit into physical memory
- Physical memory \Leftrightarrow Backing store
- Swap back into memory
 - Same location
 - Different location
- Context Switch Time
 - Size * Transfer rate
 - How does this affect time slices?


Contiguous Memory Allocation

- Two Partitions
 - OS
 - User Processes

Allocation of Memory

- Allocate part of User Space partition to each process
- Hole (technical term)

- First Fit
- Best Fit
- Worst Fit

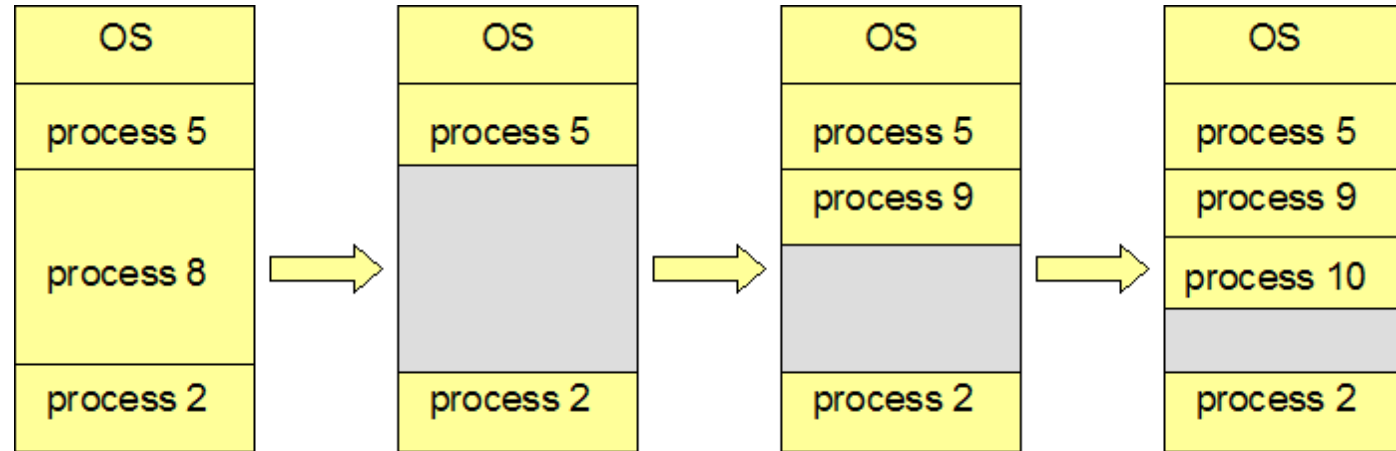

- Best Fit/First Fit found (experimentally) to be better than Worst Fit in terms of time and memory utilization
- What happens if 5 & 2 terminate?

Fragmentation

- External
- Internal
- Compaction
- 50% Rule


Paging!

- Noncontiguous memory allocation
- Frame
 - Physical memory


- Page
 - Logical memory
 - Allocate an entire page at a time

- Page table


- Internal Fragmentation

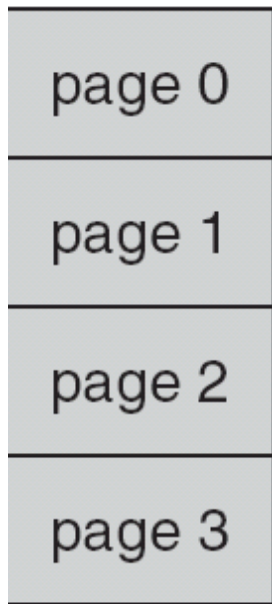

logical
memory

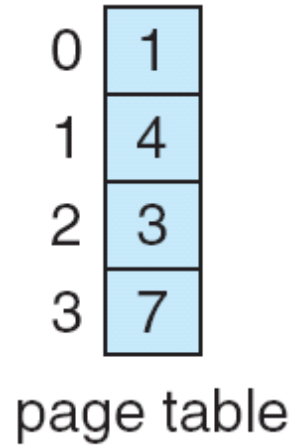

frame
number

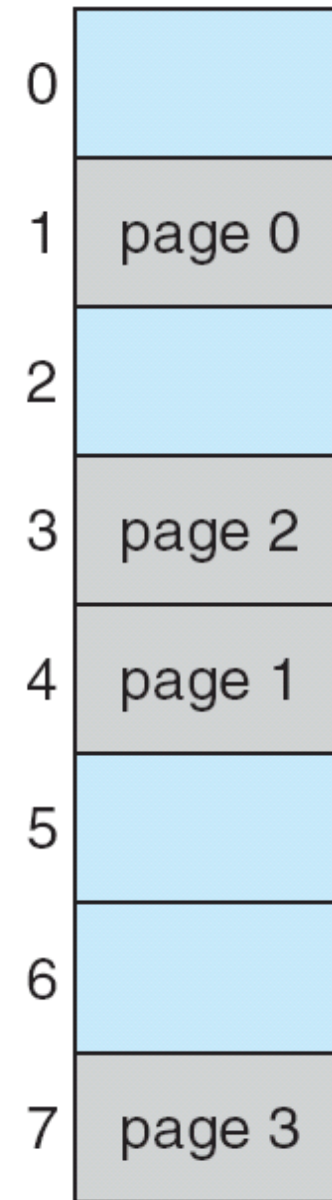


physical
memory


Page and Frame size are determined
by the hardware

Address Translation

- Logical Address to Page Number + Offset

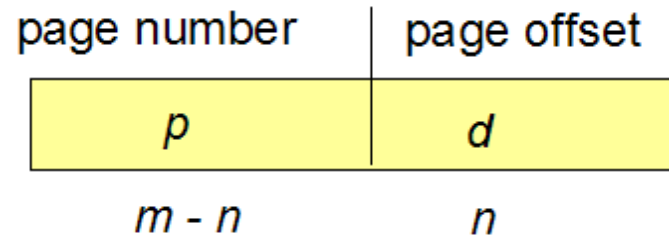

- Logical address space 2^m and page size 2^n

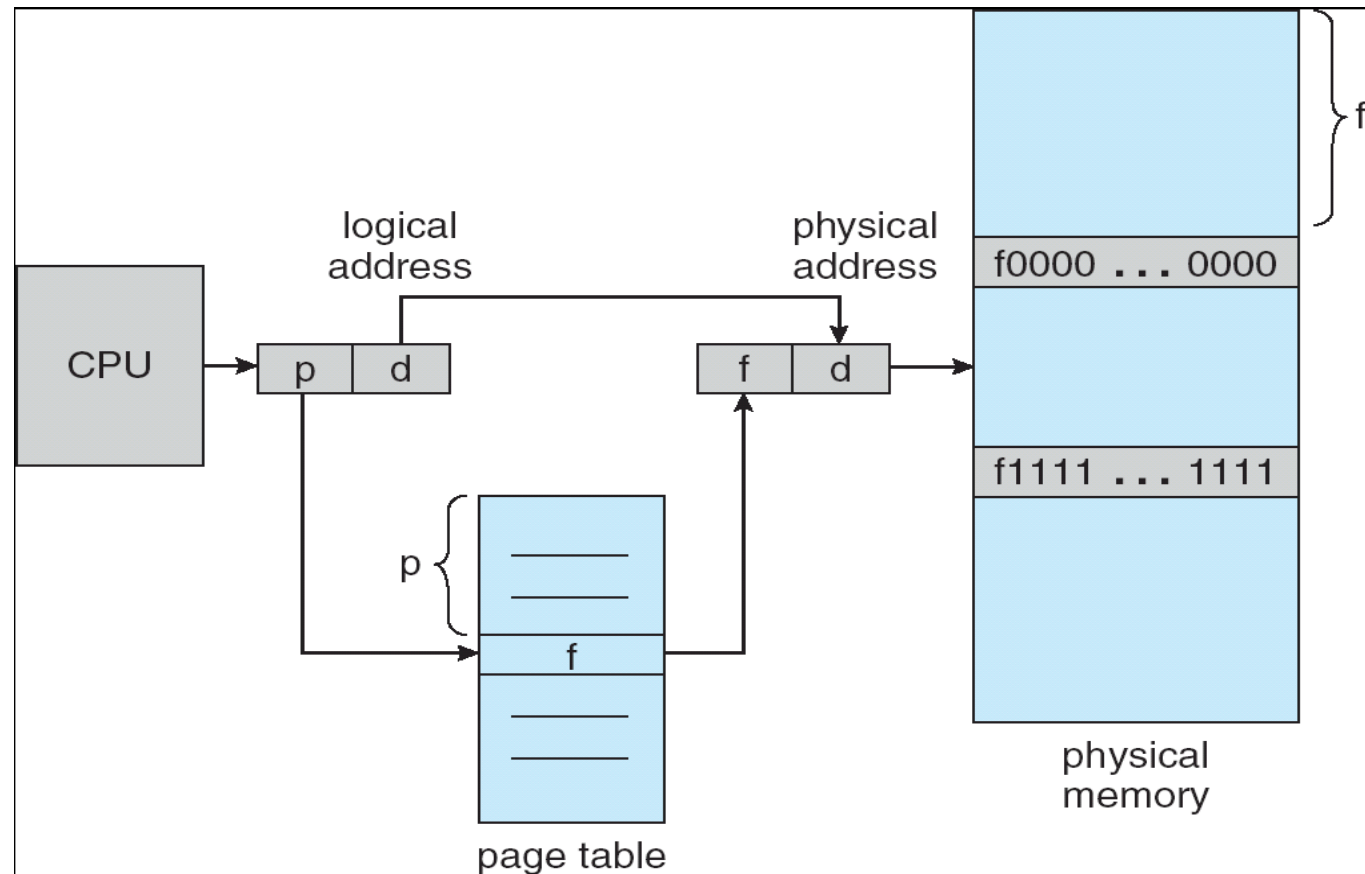

- 32 byte memory
- 4 byte pages
- No guarantee of ordering
- What happens

```
char *pChar = 0x7;
pChar++;
print pChar;
```

0	a
1	b
2	c
3	d
4	e
5	f
6	g
7	h
8	i
9	j
10	k
11	l
12	m
13	n
14	o
15	p

logical memory

0	5
1	6
2	1
3	2


page table

0	
4	i j k l
8	m n o p
12	
16	
20	a b c d
24	e f g h
28	

physical memory

Page Table

- Pages are not always reloaded to the same frame
 - ??
- Contains base address of each page in physical memory
 - Per process (usually)
 - Which frame is it in
 - In main memory
- Hardware (not per process)
 - Page table base register (PTBR)
 - Page table length register (PRLR)
 - Translation look-aside buffers (TLBs)
 - Address space identifiers (ASIDs)
 - protection

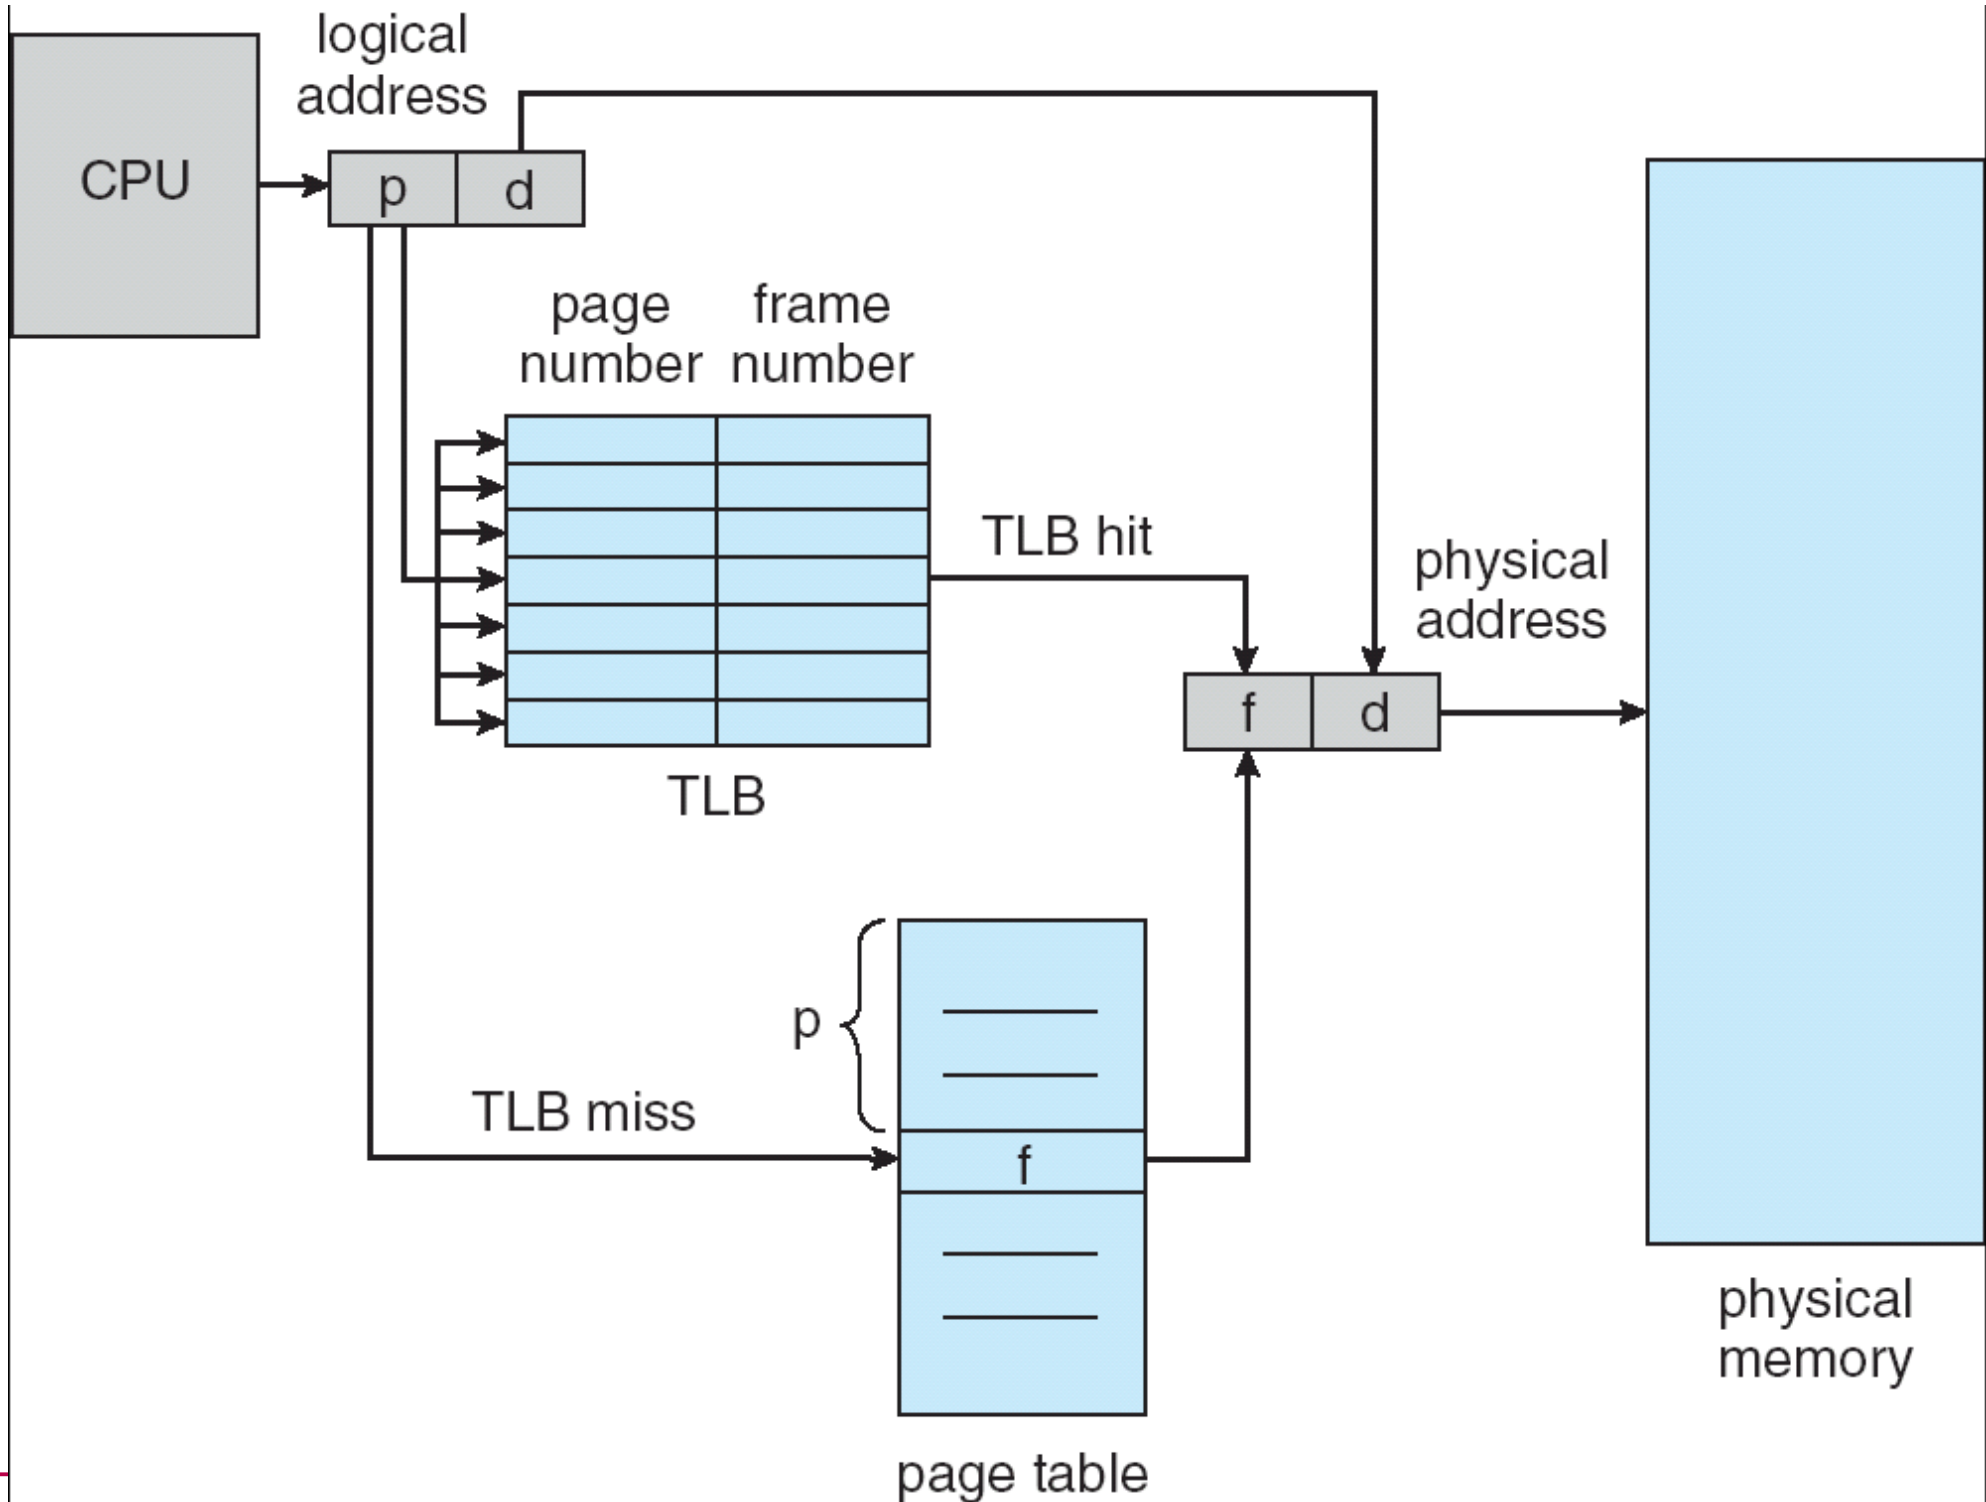


Logical -> Physical Address

- What do we need to do to get a physical address?
 - How long will it take?


Protection

- Add valid/invalid bit to each page table entry
- ASIDs in TLBs denote which process owns each frame

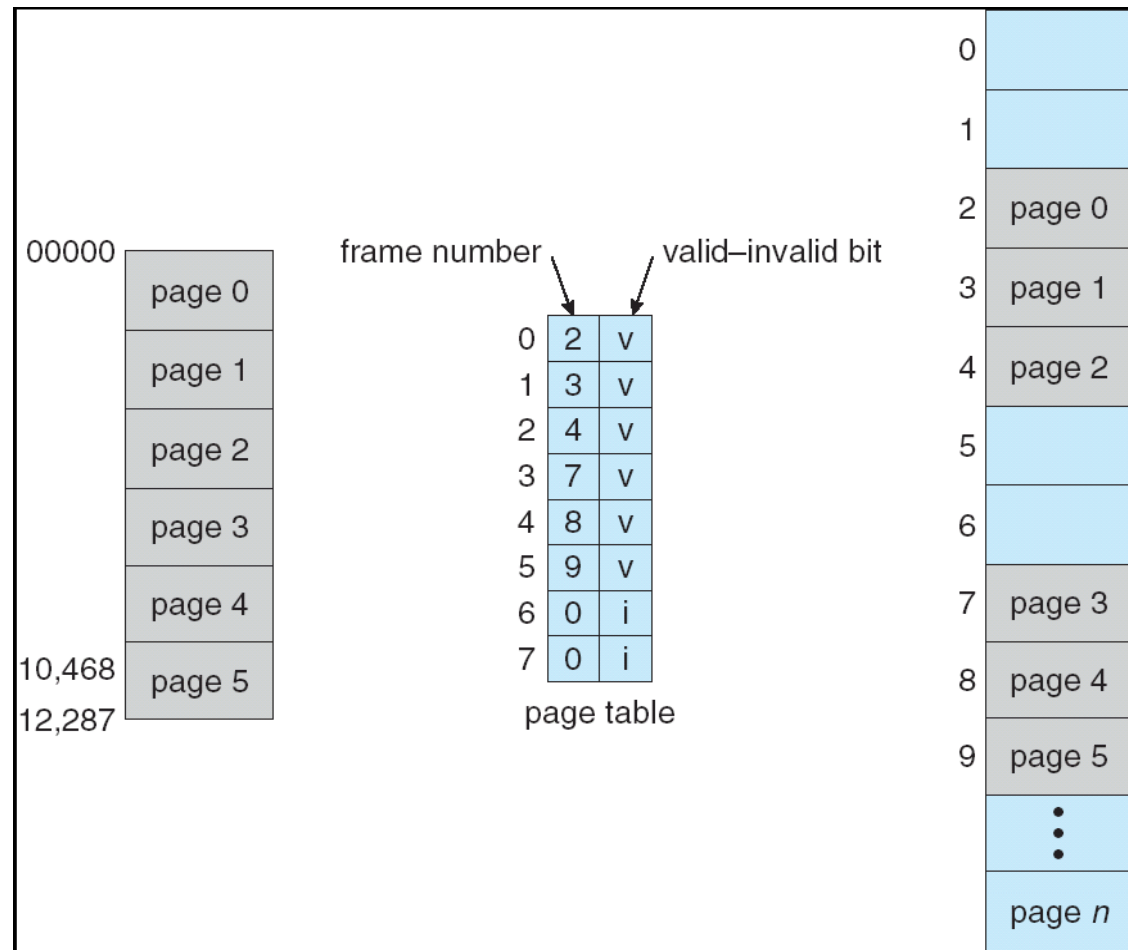

Shared Pages


- .dll / .so
 - Share read only code pages
- Shm
 - Shared read/write data pages

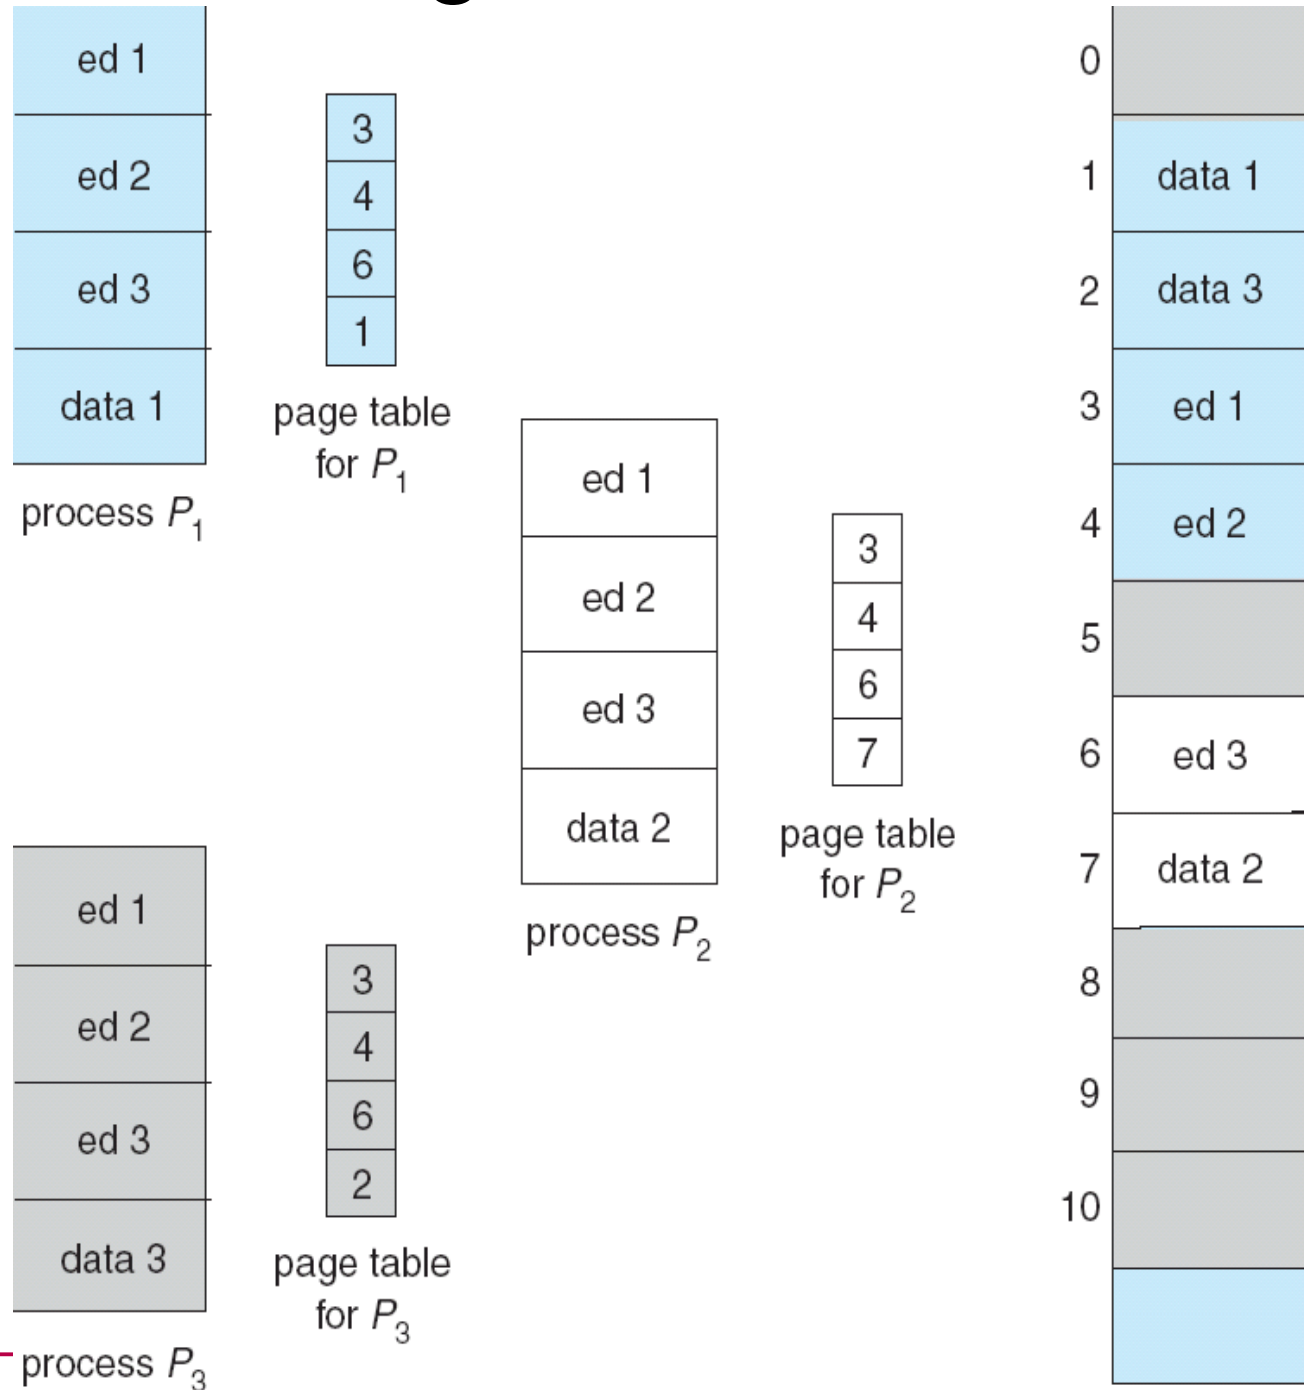






Problems with page tables

- What do you think?

Multilevel Page Tables

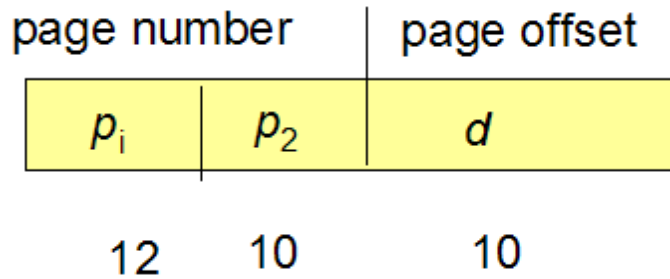


- Page the page table
- Forward mapped page table

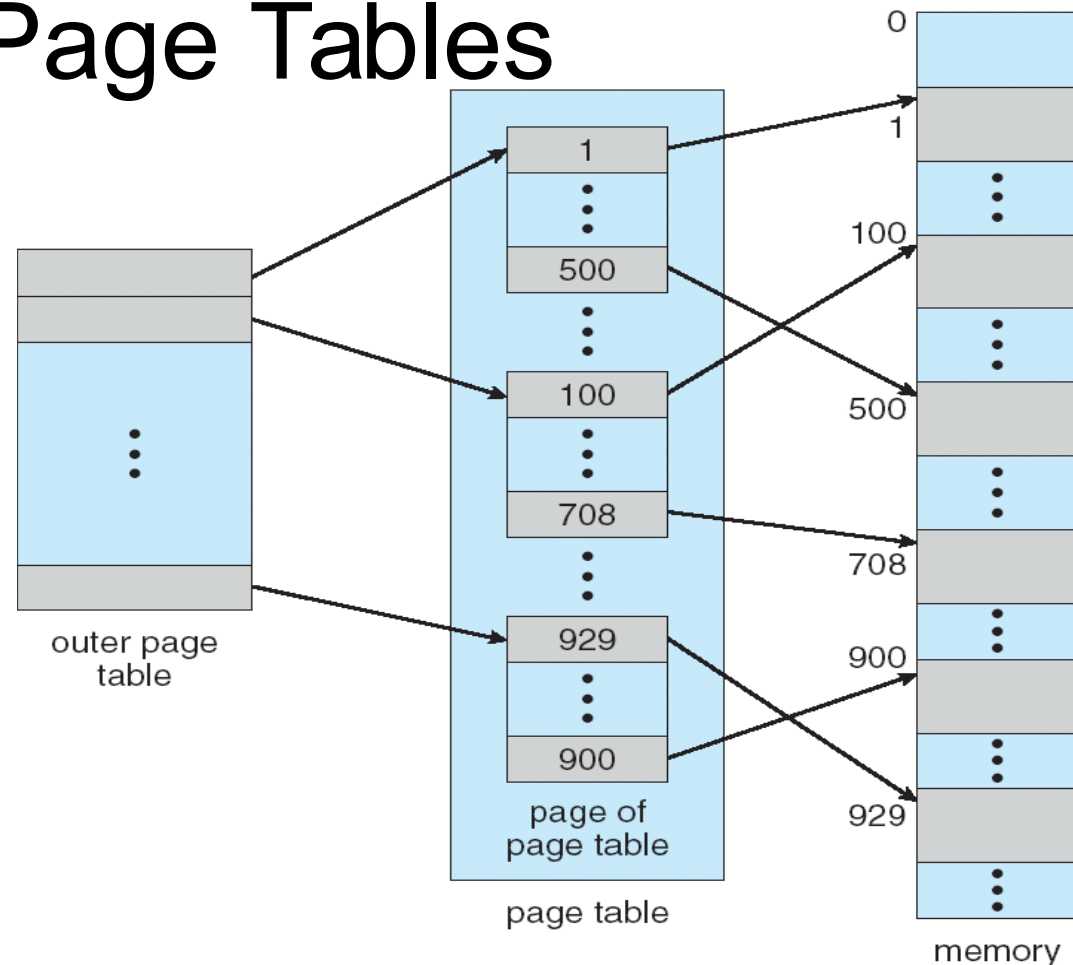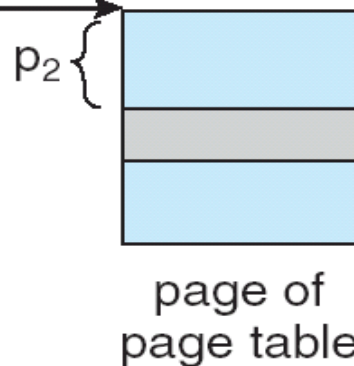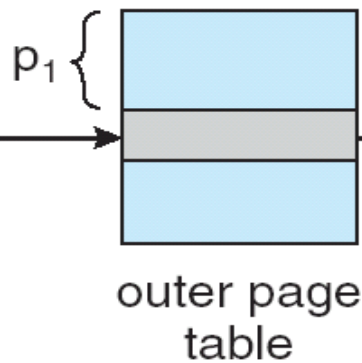

Hashed Page Tables

- Address spaced > 32 bits
- Use Virtual address to hash into the table

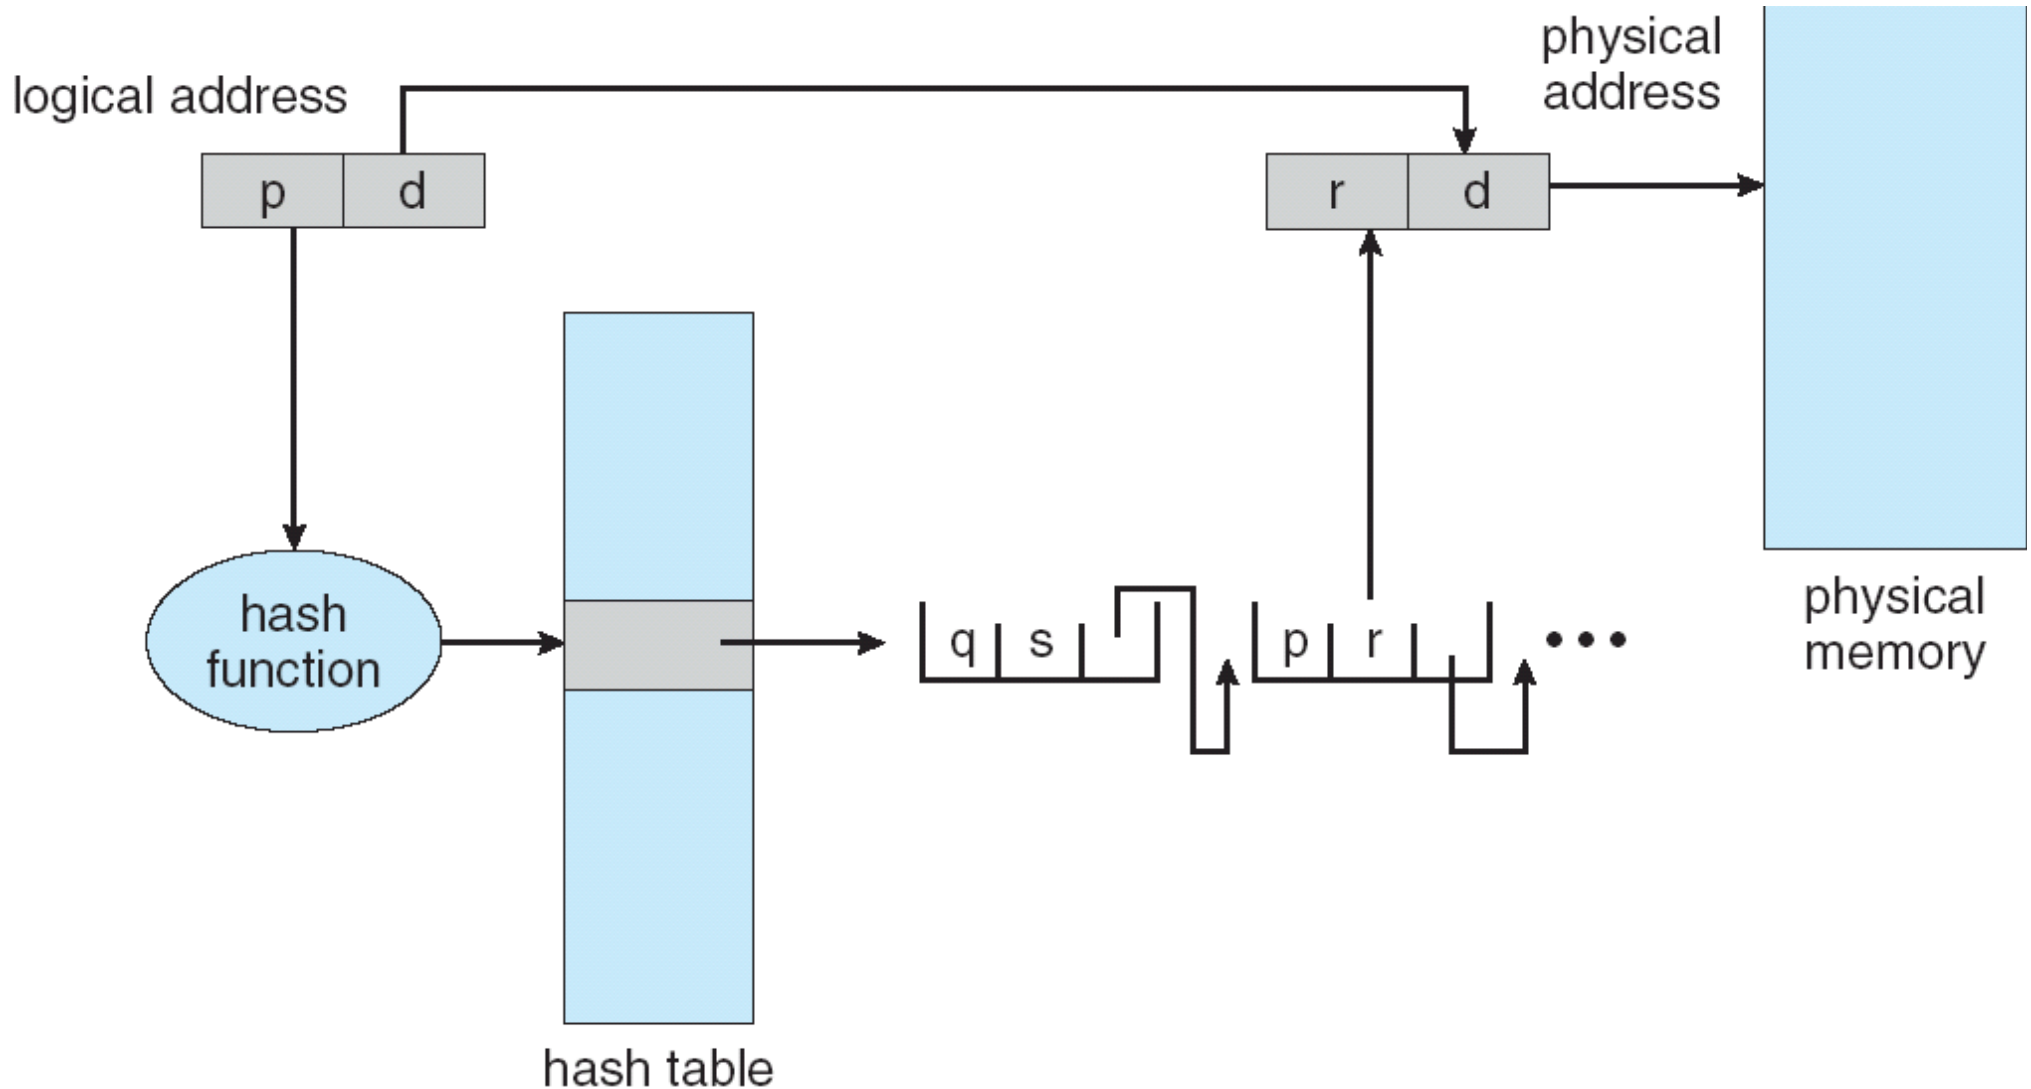

Inverted Page Table

- One entry per **frame** in physical memory
- One page table for the entire system
- Track pid in the table
- Problem?

- Solution?

