



# Paging

---


- Physical address space of a process can be noncontiguous;
  - Avoids external fragmentation
  - Avoids problem of varying sized memory chunks
- Divide physical memory into fixed-sized blocks called **frames**
  - Size is power of 2, between 512 bytes and 16 Mbytes
- Divide logical memory into blocks of same size called **pages**
- Keep track of all free frames
- Set up a **page table** to translate logical to physical addresses
- Backing store likewise split into pages
- Still have Internal fragmentation





# Address Translation Scheme

- Address generated by CPU is divided into:
  - **Page number** ( $p$ ) – used as an index into a **page table** which contains base address of each page in physical memory
  - **Page offset** ( $d$ ) – combined with base address to define the physical memory address that is sent to the memory unit

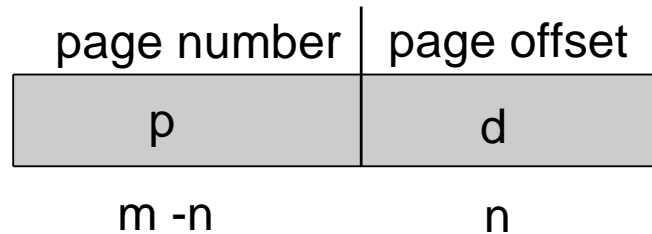


- For given logical address space  $2^m$  and page size  $2^n$






# Paging Hardware

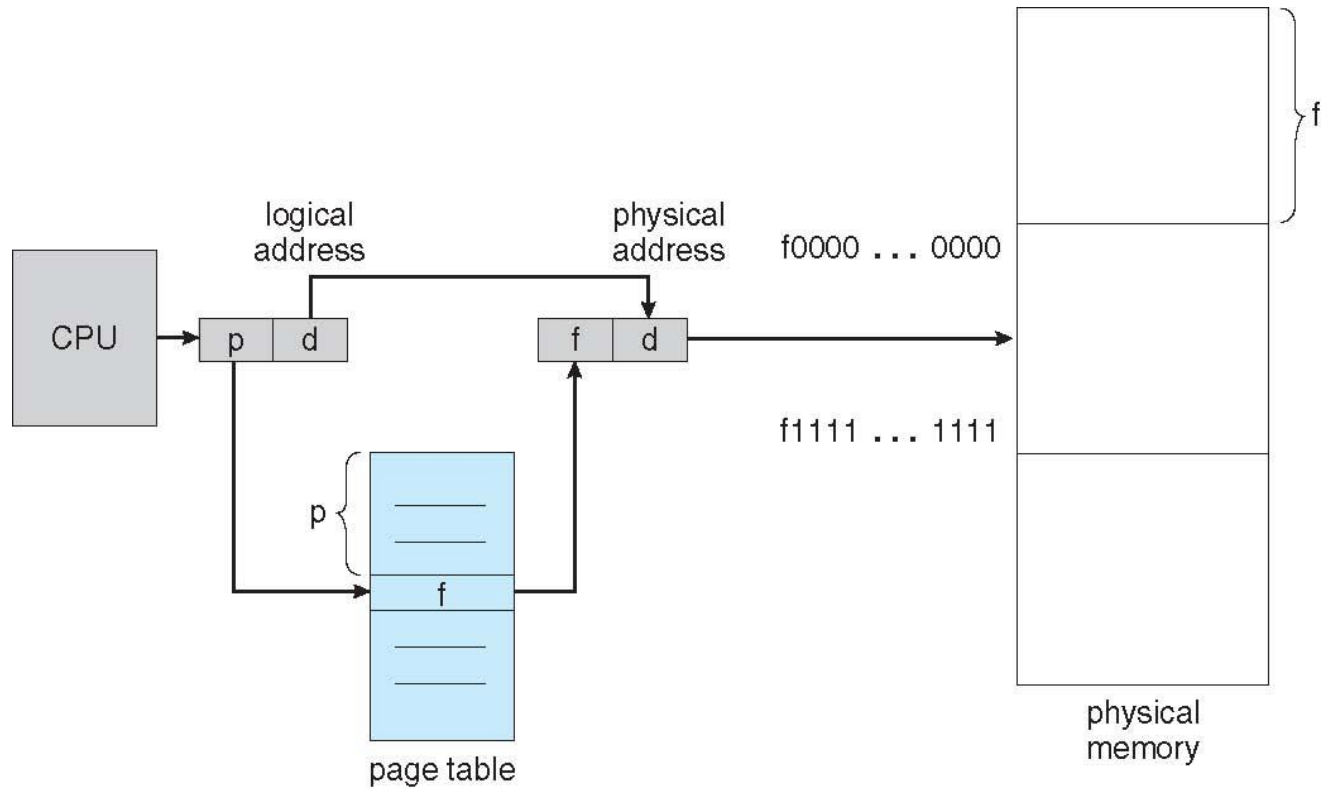





# Paging Model of Logical and Physical Memory

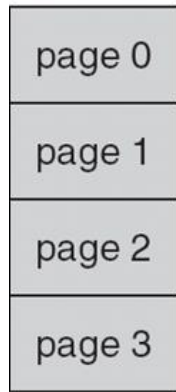

logical  
memory



frame  
number

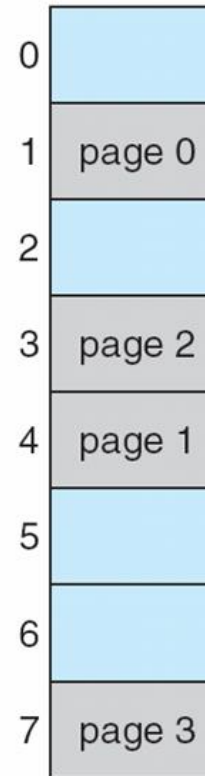

physical  
memory





# Paging Example

0	a
1	b
2	c
3	d
4	e
5	f
6	g
7	h
8	i
9	j
10	k
11	l
12	m
13	n
14	o
15	p

logical memory


0	5
1	6
2	1
3	2

page table

0	
4	i j k l
8	m n o p
12	
16	
20	a b c d
24	e f g h
28	

physical memory

$n=2$  and  $m=4$  32-byte memory and 4-byte pages





# Paging (Cont.)


---

- Calculating internal fragmentation
  - Page size = 2,048 bytes
  - Process size = 72,766 bytes
  - 35 pages + 1,086 bytes
  - Internal fragmentation of  $2,048 - 1,086 = 962$  bytes
  - Worst case fragmentation = 1 frame – 1 byte
  - On average fragmentation =  $1 / 2$  frame size
  - But each page table entry takes memory to track






# Free Frames

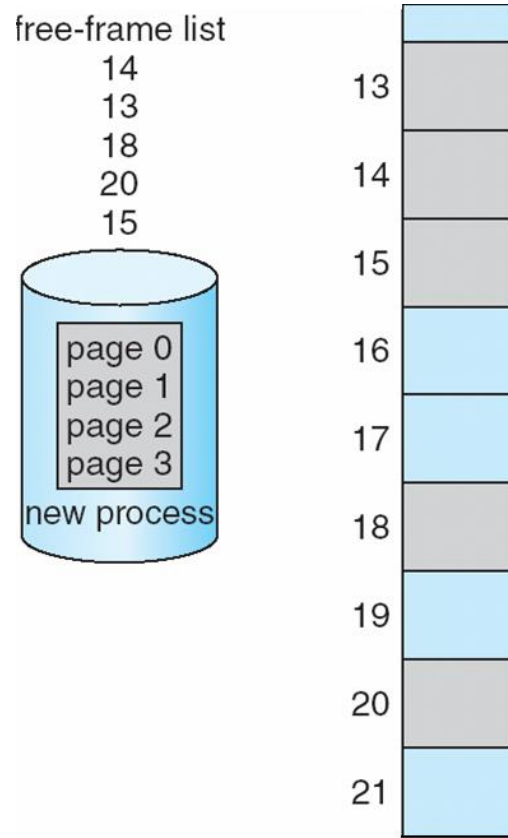

(a)

Before allocation

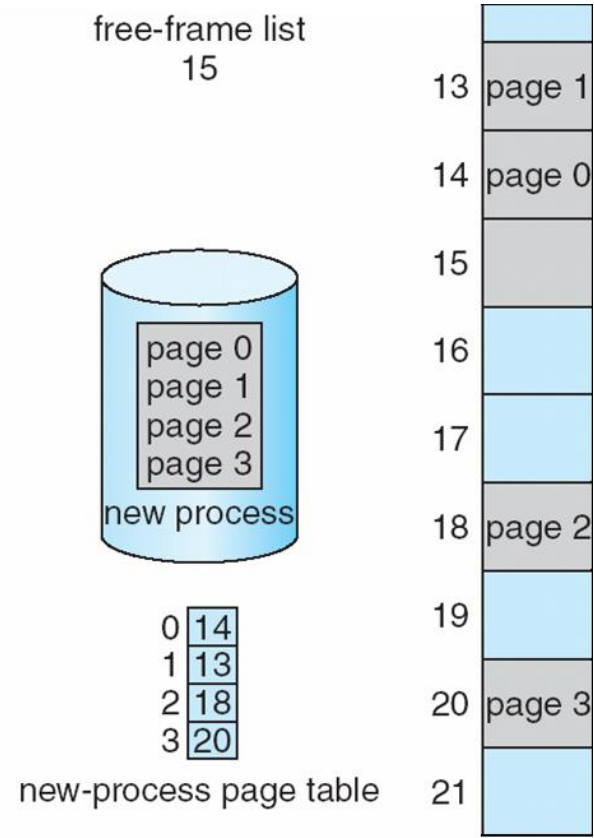

(b)

After allocation





# Implementation of Page Table

---

- Page table is kept in main memory
- **Page-table base register (PTBR)** points to the page table
- **Page-table length register (PTLR)** indicates size of the page table
- In this scheme every data/instruction access requires two memory accesses
  - One for the page table and one for the data / instruction
- The two memory access problem can be solved by the use of a special fast-lookup hardware cache called **associative memory** or **translation look-aside buffers (TLBs)**

